


## Features:

- Air bearing design
- Calibration bandwidth of 3 Hz to 15 kHz
- Provides improved transverse performance over traditional flexural-based exciters
- Lightweight Magnesium (Mg) armature with removable aluminum (Al) test instrument mounting fixture (TIMF)
- Automatic payload re-centering (pneumatic)
- User-replaceable reference accelerometer, not built-in to the armature
- 100 mV/g IEPE internal reference accelerometer
- Capable of resonance frequency search of device under test (DUT) to 18 kHz (max)
- Max DUT weight/payload: <910 gm
- Armature axial resonance of 19 kHz  $\pm$ 5%
- Complies with ISO 16063-21, Clauses 4.3 & 4.4
- Transverse motion meets ISO 16063-21
- Transducer mount: Female 10-32 thread (1/4-28 opt.)
- Capable of 9g RMS max. acceleration level
- Maximum stroke between stops: 13 mm pk-pk
- Continuous stroke for calibration: 10 mm pk-pk max.
- Max Force output: 12 lbs
- Air supply: 6 bar, 150 l/m; 90 psi, 5 CFM
- Dimensional specifications:
  - o CAL12AB Diameter: 74 mm
  - o Exciter: 190 mm dia. X 170 mm H
  - o Weight: 16 kg



**Air Bearing Calibration Vibration Exciter**  
**Model CAL12AB**

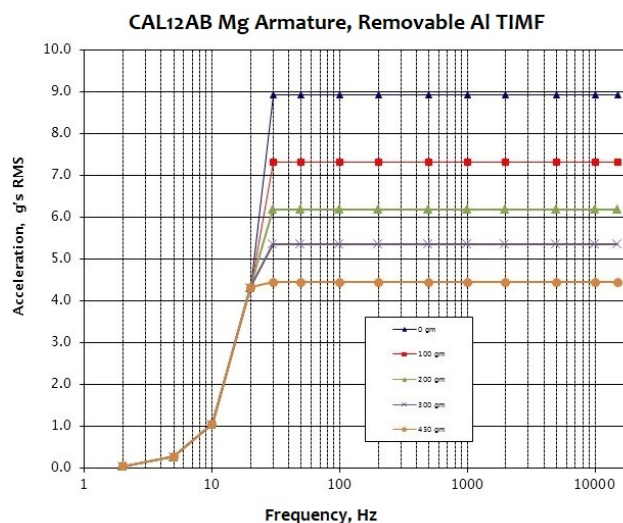

## Applications:

- Calibrates accelerometers and vibration sensors weighing <910 grams and with <70 mm diameters
- Available from MB Dynamics as a stand-alone product, or as part of a full automated calibration test system
- Sensor manufacturing quality assurance testing
- In-laboratory R&D instrumentation verifications

## Other MB Calibration Vibration Exciters:

- CAL25AB, operating to 15 kHz
- CAL25HF, high frequency, operating to 20 kHz
- CAL50, 1" stroke, operating to 10 kHz
- CAL110, 1.5" stroke, 110 lbf, operating to 10 kHz

**MB Dynamics, Inc.**

25865 Richmond Road, Cleveland, OH 44146 USA

Tel: +1 216 292 5850 • Fax: +1 216 292 5614

For Sales: [sales@mbdynamics.com](mailto:sales@mbdynamics.com) • For Service: [service@mbdynamics.com](mailto:service@mbdynamics.com)

[www.mbdynamics.com](http://www.mbdynamics.com)

MB-CAL12AB-0119