




Energizer **SILVER**

Exciter System

Quiet for Squeak & Rattle and powerful for vibration!

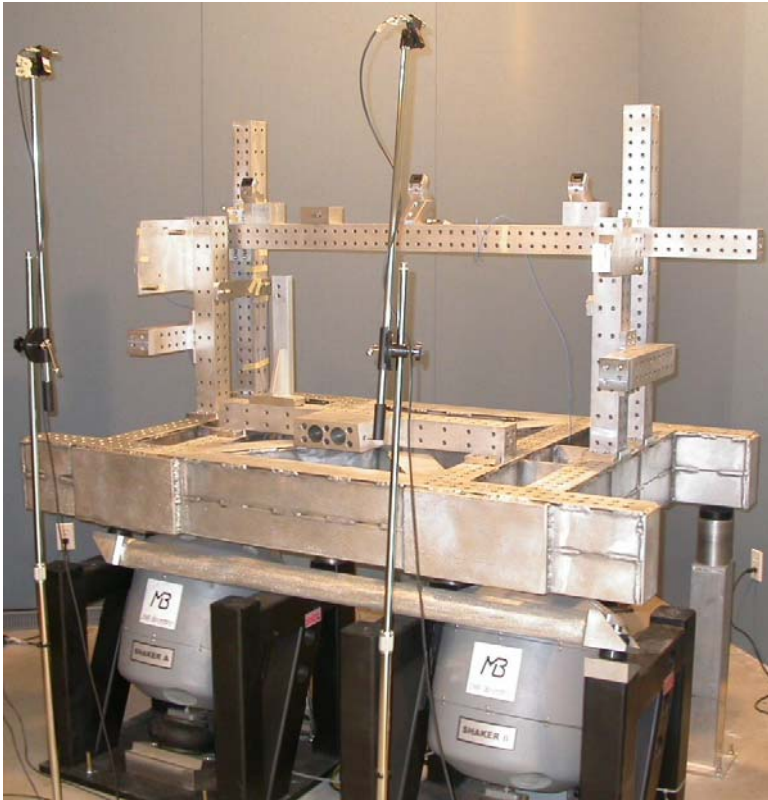

- ❖ 1.0 - 1.2 sones N10 Loudness (30 dBA) S&R Background Noise
- ❖ No exciter noise to mask S&Rs and frustrate root sourcing
- ❖ Energizers recommended for S&R testing in GMW14011 and Ford DV/PV Outlines
- ❖ Quiet Package – no exciter noise – no cooling system – no blower
- ❖ Stiff load support in SILVER resists large overturning moments due to side loads

- ❖ 4,450 N pk and 2,900 N RMS (1,000 lbs. pk and 650 lbs. RMS), forced-air cooling
- ❖ 2,325 N pk and 1,550 N RMS (525 lbs. pk and 350 lbs. RMS), convection cooled
- ❖ Frequency response: DC to 2,500 Hz
- ❖ Displacement: 50 mm between stops
- ❖ 100 g half-sine shocks on payloads \leq 5kg
- ❖ Multi-axial vibration; trunnion isolation
- ❖ 750mm X 1080mm; 890mm to table top



Large, versatile mounting table – 250 mm dia;
8.5 kg bare table;
M6 inserts; 70 kg load with optional air spring

